



FUSION BATTERY

LITHIUM



BLUE TOOTH

V-LFP-12-150FT**LITHIUM IRON PHOSPHATE BATTERY**

PERFORMANCE

- o Long Cycle Life>2000cycles @100% DOD.
- o High DensityHigh Discharge Current, High Temperature Range.
- o Light Weight, Maintenance Free .
- o Fast Charging.
- o Environment Friendly.

FEATURES

- o Lithium Iron Phosphate (LiFePO₄)
- o Integrated Battery Management System(BMS)
- o BMS with Intelligent Cell Balancing
- o Sealed ABS Plastic Housing
- o Bluetooth

BATTERY DATA SHEET

Electrical Parameters

Nominal Voltage	12.8V
Rated Capacity	150Ah
Energy	1920Wh
Resistance	≤30m Ω
Efficiency	99%
Cycle Life	>2000cycles @1C,100% DOD
Self Discharge	2% per Month
Max. Battery connected in Series	4PCS
Max. Battery connected in Parallel	20PCS

Discharge Parameters

Continuous Discharge Current	100A
Peak Discharge Current	300A (5 seconds)
Recommended Volt. Disconnect	10V
BMS Discharge Cut-off Voltage	8V
Reconnect Voltage	9.2V
Short Circuit Protection	200~600 us

Compliance Certificate

Certifications	UL1642,UL2054
	CE
	IEC62133 & CB
	KC
	BIS
Shipping Classification	UN3480, Class 9,UN38.3

Mechanical Parameters

Dimension(L x W x H)	551 x110 x 240 mm
	21.69 x 4.33 x 9.45"
Weight	15.5kg(34.17lbs)
Terminal Type	M8 * <i>Terminal Torque 10-12 (N.m)</i>
Battery Housing	ABS, UL-94 V-0
Housing Protection	IP67
Cell Type-Chemistry	LiFePO ₄ Cell
SOC Display(Optional)	None

Charge Parameters

Charge Method	CC-CV
Charge Voltage	14.4~14.8V
Recommended Float Voltage	13.8V
Recommended Charge Current	50A
Maximum Charge Current	100A
BMS Charge Cut-off Voltage	15.6V

Temperature Parameters

Discharge Temperature	-20 to 60°C (-4 to 140°F)
Charge Temperature	0 to 45°C (32 to 113°F)
Storage Temperature	-25 to 60°C(-13 to 140°F)
BMS Low Temperature Cut-off	-10°C(14°F)
BMS Low Temperature Turn-On	0°C (32 °F)
BMS High Temperature Cut-off	65°C(149°F)
BMS High Temperature Turn-On	55°C (131°F)


HEAD OFFICE

Unit 30 76 Hume Highway LANSVALE NSW 2166


Tel: +(02) 9755 7851 Fax: +(02) 9755 7852

Email: batteries@superstart.com.au


CYCLE LIFE vs. DEPTH OF DISCHARGE(DOD)
DISCHARGE@0.1C, 25°C

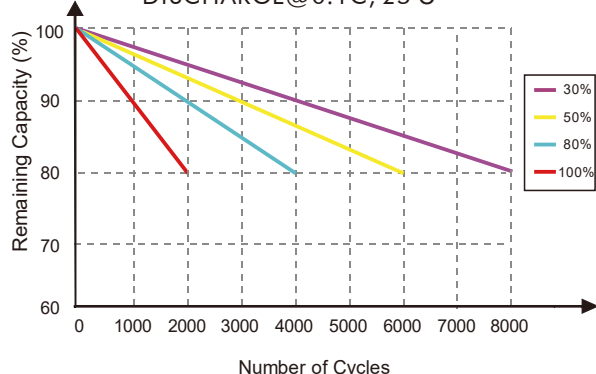


DISCHARGE CAPACITY at VARIOUS TEMPERATURES
DISCHARGE @1C, 25°C

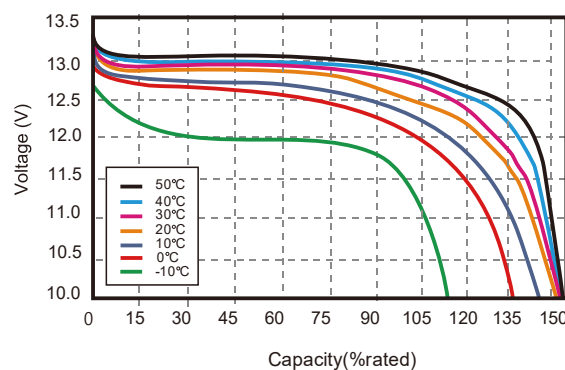



STATE OF CHARGE CURVE @0.5C, 25°C

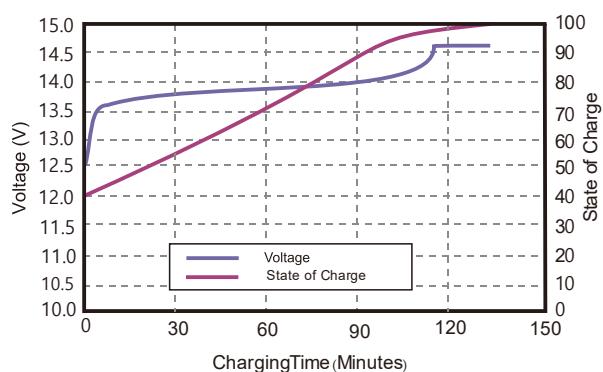



CHARGING CHARACTERISTICS @0.5C, 25°C

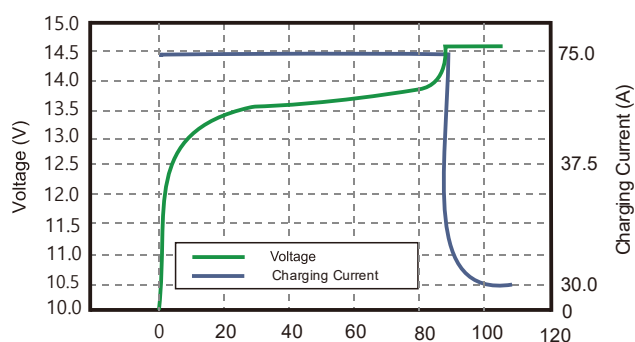

Battery Dimension

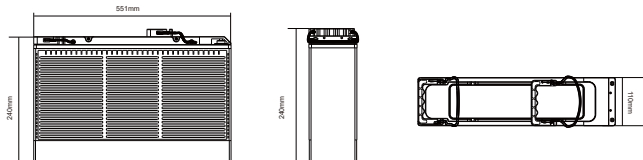

Terminal Torque
10-12 (N.m)

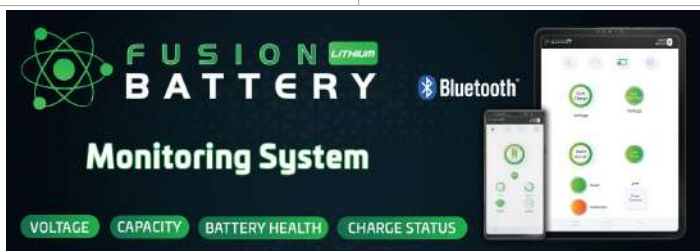

View live data with the intelligent Fusion Lithium Bluetooth 4.0 BLE technology.

Find the identification code on top of Fusion Lithium battery. Open the Fusion Lithium App and click relevant code to connect.

- Access your BMS independently with multiple batteries
- Monitor the status of your lithium battery: State Of Charge (SOC), Temperature, charging or discharging current, etc
- Track the Cycle Life of your Lithium Battery
- Assess what protections have been triggered



Battery Applications

- + Marine (House Batteries)
- + RV / Camping (Automotive)
- + Data Center UPS
- + Telecom Backup Power
- + Military Power Supply
- + Solar Energy Storage System
- + Solar Street LED Lightings
- + Autonomously Guided Vehicles (AGVs)
- + Industrial Robotics & Handling Equipment
- + Floor Cleaning Machines
- + Power Tools, Lawn Mower
- + Electric Bike & Motorcycles
- + Electric Mobilities(E-scooters, Wheelchair)
- + Golf Trolley & Golf Carts
- + Medical Devices
- + Electric Boats
- + Electric Fences



TRADING SINCE 1995



QUALITY ASSURANCE
ISO 9001