




APPLICATIONS

- Car start
- EV/HEV
- Engine start
- Toyota Prius (VW50), 2016 onward
- BMW X6, 2015 onward (Starting Battery)
- VW UPI, 2012-2014

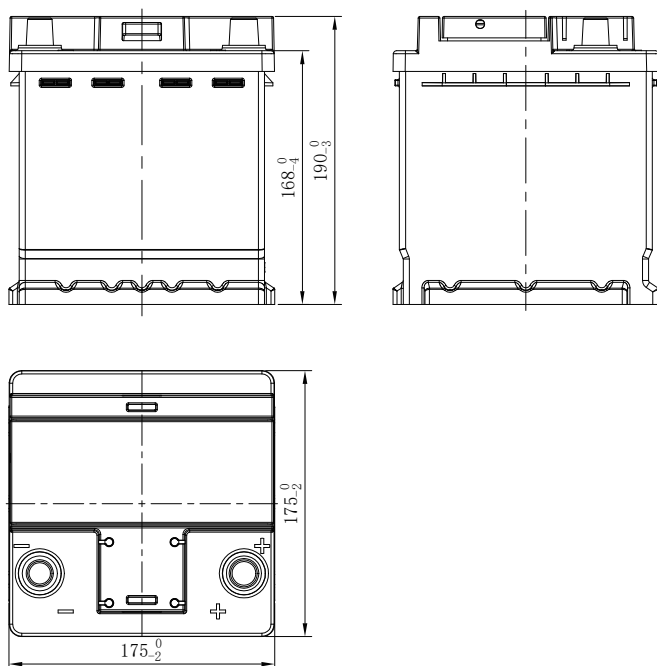


CHARACTERISTICS

Item	Specifications	
Nominal Voltage	12V	
Nominal Capacity (20HR)	40Ah	
Reserve Capacity	60min	
Cold Cranking Amps@0°F (-18°C)	320A	
Cold Cranking Amps@77°F (25°C)	416A	
Dimension	Length	175mm (6.89inches)
	Width	175mm (6.89inches)
	Container Height	190mm (7.48inches)
	Total Height (with Terminal)	190mm (7.48inches)
Approx Weight	11.2kg (24.7lbs)	
Terminal	1	
Cell layout	0	
Hold-Down	B13	
Case	Black-PP Material	
Cover	Black-PP Material	
Handle		

GENERAL FEATURES

- Maximum CCA and life
- Valve regulated technology
- Advanced Absorbed Glass Mat (AGM) technology
- Top-level safety - absolutely no free acid
- 2x Faster Charge Acceptance than conventional starter batteries
- 3x higher cycle life than conventional starter batteries
- Suit for working in partial state of charge operations (PSoC)
- OE quality certification

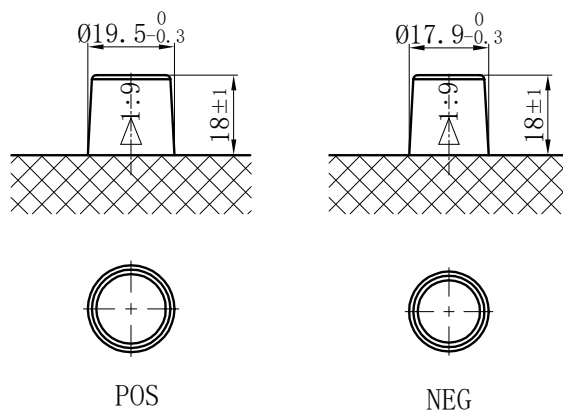

*Values are subject to variation of +/- 5% in normal manufacturing processes.

HEAD OFFICE
Unit 30 76 Hume Highway LANSVALE NSW 2166
Tel: +(02) 9755 7851 Fax: +(02) 9755 7852
Email: batteries@superstart.com.au

Ver. 09/2024



TRADING SINCE 1995

www.superstart.com.au

